

# Bohrmeister®

## BM150DTH

## DTH/ ROTARY RIG

### PERFORMANCE

DRILLING DEPTH CAPACITY: 150 m

ROD SIZE: 4 1/2" X 6M

HOLE CAPACITY: 12" (305mm) in Soft Formations  
10" (254mm) in Hard Formations

PULL UP FORCE: 200 KN

PULL DOWN FORCE: 110 KN

FEED UP & FEED DOWN SPEED: 0-0.6 m/s (var)

MAST LENGTH: 10m WITH 6.6m TRAVEL

DRILL ANGLE 45-90 DEGREES

### DRILL HEAD

HYDRAULIC DRIVEN HEAVY DUTY

TORQUE 6000Nm @ 100 RPM

SPEED 0-130 RPM

RATIO 5:1

### CARRIER

MERCEDES BENZ 6X4, AXOR 3335P/45

COMPRESSOR (mounted on separate carrier)

MAKE: INGERSOL RAND

MODEL: XHP1170WCAT


CAPACITY: 24 BAR, 1170CFM



# Bohrmeister®

**BM150DTH**

**DTH/ROTARY RIG**

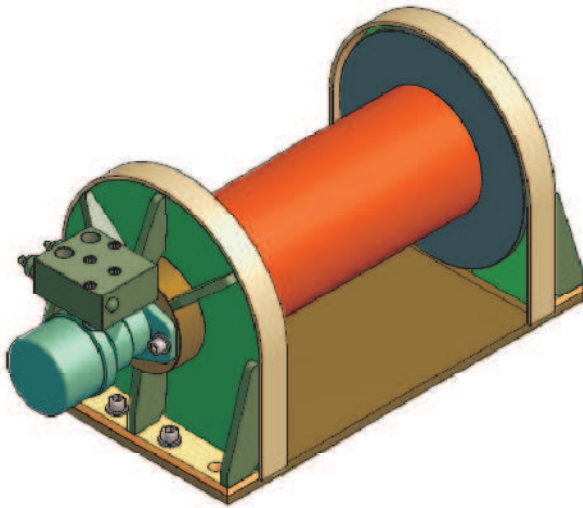

#### **AUXILIARY ENGINE**

MAKE: CUMMINS, 6BTA

POWER: 120Kw @ 1500 rpm

FUEL TANK: 400 litres

#### **HYDRAULICS**

STANDARD OFF THE SHELF PRODUCTS

SINGLE OPEN CIRCUIT LS PUMP: 280l/min, 280 bar

OIL RESERVOIR: 600 litres

FILTRATION: 10µM abs

PROPORTIONAL CONTROLS: SAUER DANFOSS

#### **FEATURES**

AUTOMATED ROD HANDLER (OPTIONAL)

HEAVY DUTY STABILIZERS (800mm stroke)

HOSES NEATLY CONTAINED IN ENERGY CHAIN

LOW FUEL CONSUMPTION (40% better than other rigs)

LOW MAINTENANCE

SAFETY ALARM & WARNING DEVICES

UTILITY WINCH (2000kg)

ROTATING DOUBLE CLAMP WITH SPLIT GUIDE BUSH

MUD PUMP, FMC BEAN, 600L/MIN @ 25 BAR

INJECTOR PUMP, FMC BEAN 60L/MIN @ 24 BAR

STATE OF THE ART CONTROL PANELS